




Attributes that Go On and On: Reliable, Quiet, Compact, Long Life, Serviceable...

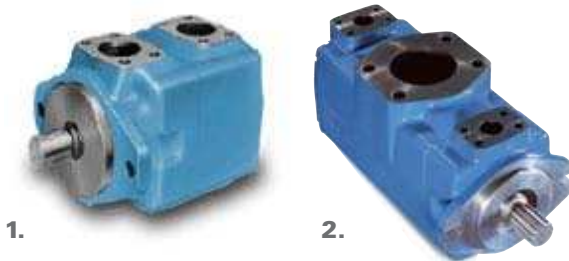

1. Vane Motors

The cartridge kit design makes for uptime and easy serviceability. Additionally, a low break out force smooths out the start-up speed allowing for vane motors to be more forgiving to system pressure spikes. Vane motors offer an efficient and economical means of applying variable speed, rotary hydraulic power and offer variable horsepower (constant torque). They can be stalled under load without damage when protected by a relief valve.

Applications: Plastic injection molding and conveyors.

Specifications:

Displacements from 1.32 in³/rev (21.6 cc/rev)–19.35 in³/rev (317.1 cc/rev).

Pressures up to 175 bar (2,500 psi) (size dependent).

Rated Speeds up to 4,000 rpm.

Torque Range up to 119–847 Nm (1,050 to 7,500 lb-in).

Heavy duty shaft bearing is also available.

2. VMQ Pumps

The Vickers VMQ is the **world leader** in pressure capacity and noise levels and is available in a complete range of singles, doubles, triples and thru-drives. The unique wafer plate design of the VMQ allows for the increase in viscosity and pressure rise during cold start-up – something that competitors do not have.

Applications: Winches, oil field and drilling equipment, earthmoving and construction equipment, die casting, molding machines, press machines, trash compactors, balers and primary metals.

Specifications:

Displacements from .60 in³/rev (10 cc/rev)–31.4 in³/rev (516 cc/rev) Using single; double and triple pump combined flow.

Pressures up to 293 bar (4,250 psi).

Rated Speed up to 3,000 rpm.



Powering Business Worldwide

Did you Know?

We are the pioneers of vane technology!



3.

3. V Pumps

The V series pumps are designed for medium pressure industrial applications. Its industry-first intra-vane cartridge design provides long operating life, low noise, outstanding volumetric efficiency and excellent serviceability.

Applications: Molding machines, presses, material handling machines, industrial power units and primary metals.

Specifications:

Displacements from .45 in³/rev–20.61 in³/rev (7.4–337.8 cc/rev). Using single; double and triple pump combined flow.

Pressures (max.) up to 210 bar (3,000 psi) continuous.

Rated Speeds up to 2,700 rpm.



4.

4. V10/V20 Pumps

The V10 and V20 pumps are designed for low- to medium-pressure mobile and industrial applications. They are the premium fixed pump choice as the main system pumps for small industrial and mobile equipment or as pilot and auxiliary pumps for complex systems. They are also the standard steering pump technology for heavy-duty trucks and interstate buses. Optional integrated flow control valves simplify system design and installation.

Applications: Power units, power steering, skid steers, lift trucks and balers.

Specifications:

Displacements from 0.2 in³/rev (3.3 cc/rev)–5.18 in³/rev (84.8 cc/rev). Using single and double pump combined flow.

Pressures (max.) up to 210 bar (3,000 psi) continuous.

Rated Speeds up to 4,800 rpm.



5.

5. VQ(H) Pumps

The VQ series pumps are designed for medium pressure mobile applications. It's specifically designed for higher pressure and higher speed mobile requirements. It has the industry-first intra-vane cartridge design that provides long operating life, outstanding volumetric efficiency and excellent serviceability. The design is widely adopted by world's leading mobile equipment manufacturers.

The VQH series pumps are the higher pressure and higher performance version of VQ series pumps. VQH pumps use strong ductile iron housings and have the same envelope size as VQ pumps.

Applications: Wheel loaders, lift trucks, refuse trucks and aerial booms.

Specifications:

Displacements from .45 in³/rev (47 cc/rev)–19.22 in³/rev (315 cc/rev), using single and double pump combined flow.

Pressures (max.) up to 241 bar (3,500 psi) continuous.

Rated Speeds up to 2,700 rpm.

Eaton
Hydraulics Business USA
14615 Lone Oak Road
Eden Prairie, MN 55344
USA
Tel: 952-937-9800
Fax: 952-294-7722
www.eaton.com/hydraulics

Eaton
Hydraulics Business Europe
Route de la Longeraie 7
1110 Morges
Switzerland
Tel: +41 (0) 21 811 4600
Fax: +41 (0) 21 811 4601

Eaton
Hydraulics Business Asia Pacific
11th Floor Hong Kong New World Tower
300 Huaihai Zhong Road
Shanghai 200021
China
Tel: 86-21-6387-9988
Fax: 86-21-6335-3912